

TRAYSEALING THOUGHT & DESIGNED FOR YOU

by **MECAPACK**

TRAYSEALER O² 2500 AUTOMATIC



TOOLING COMPATIBILITY



TO O² 1500



- + SIMPLICITY
- + FIABILITY
- + COMPATIBILITY
- + ERGONOMIC

O² 2500


The traysealer adaptable to different configurations
in standard or flex version (with several on-board tools)

HIGH LIGHT :

- Automatic in width with pushers traysealer
- Ergonomic and full cleanable design
- **FLEX version with integrated tool stocker (up to 4 tools)**
- **STD version with quick tool change (10min)**
- Tool compatibility with workstation traysealer O²1500
- Pneumatical sealing station with mechanical locking by rod



DIMENSION :

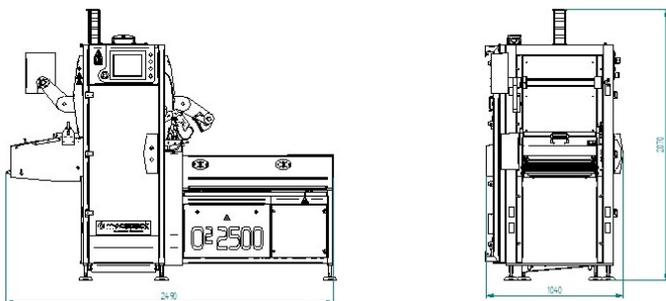

ENERGY :

Elec. : 6 at 25 KW

Air : 15m³/h at 6 bars

Eau : 100L/h (integrated cooling unit in option)

PROCESS :

Skin | Sealing | Vacuum and gas

SPEED :

Up to : 15 cpm

OPTION :

FLEX Machine configuration with integrated tool stocker | STD machine version with openable top tool | Integrated cooling unit | Spotted printed film | Loading conveyor extension | Tray automatic and integrated denester | Integrated printing solution | Automatic filling solution | Integrated tray inliner | Top lid system | ...

INDICATIVE TRAY DIMENSION

Pocket number	1	2	3	4
Length (mm)	420	325	325	325
Width (mm)	325	200	125	90
Height (mm)	100	100	100	100

SECTORS :



This document and its content have non-contractual values